ECOLIFE

LED Floodlight

SLIM FLOODPAK VI

High Efficiency Flood Light

Variable Mounting Positions

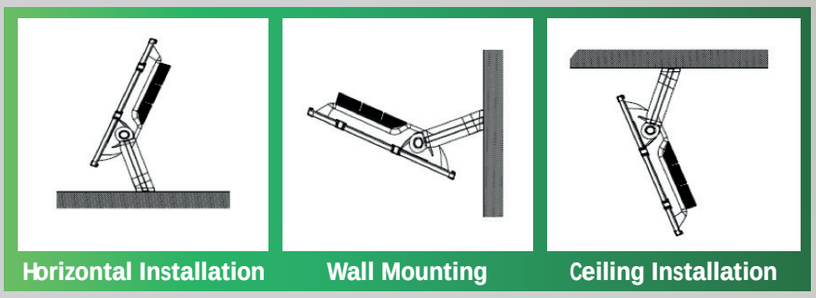

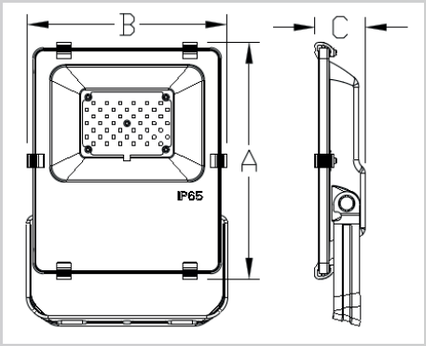

Dimension (mm)			
Power	A	B	C
10W	130	96	30
30W	250	160	50
50W	250	160	50

FEATURES

- High Power Philips LED Chip
- Easy installation with different mounting positions like Ceiling, Ground & Wall
- System Efficacy upto 130 lm/W
- Lifespan of 50,000 Hours
- Slimline Design
- Switching cycle >100,000 times
- Warranty 3 Years product replacement

APPLICATIONS

- Park Lighting
- Landscape Lighting
- Advertising Lighting
- Playground & Stadium
- Exhibition Hall
- Warehouse

SPECIFICATIONS

SKU	21492	21493	21494
Power	10W	30W	50W
Lumen	1300lm	3900lm	6500lm
CCT (K)	6000	6000	6000
Rating	IP65	IP65	IP65
PF	0.9	0.9	0.9
CRI	≥ 80	≥ 80	≥ 80
Beam Angle	120°	120°	120°
IK Rating	08	08	08

SUPPLIED BY GLOWBAL

www.glowbal.co.nz

Phone: +64 9 254 4500 | Fax:+64 9 275 8183