


## LED CEILING LIGHTS

High Lumen and Low Maintenance

V 0 Fire rated PC diffuser with even output

Super slim and robust PC body

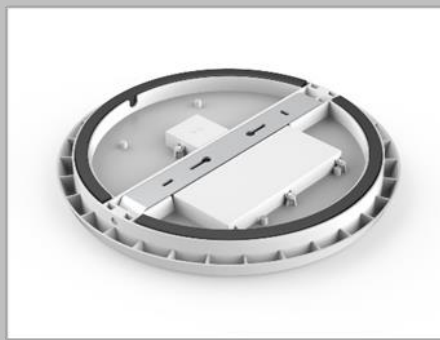

### APPLICATIONS

- Office
- Shops
- Supermarket
- Workshop
- Hotels
- Public Areas



### FEATURES

- Easy to install
- Robust PC body
- Efficacy 100lm/W
- IK 08 & IP54
- Operating Temperature -20° to 50° C
- Triac Dimmable





## LED CEILING LIGHTS

### Technical Data Sheet

SKU	Model	Power (W)	Luminous Flux	Colour Temperature (K)	Diameter (mm)	Height (mm)
29458	AL08-8-12W-CCT	12	1045-1260-1250	3000/4000/5700	200	48
29455	AL08-12-25W-D	25	2450	3000	300	40
29452	AL08-12-25W-D	25	2600	4000	300	40
29459	AL08-12-25W-CCT	25	2450-2600-2500	3000/4000/5700	300	40
29457	AL08-16-30W-D	30	2700	3000	400	52
29453	AL08-16-30W-D	30	3000	4000	400	52
29460	AL08-16-30W-CCT	30	2700-3000-2970	3000/4000/5700	400	52
29461	AL12-12-25W-CCT	25	2450-2600-2500	3000/4000/5700	L=300 W=300	40



Round Bulkhead



Square Bulkhead -29461





# ECOLIFE

## LED CEILING LIGHT



## LED CEILING LIGHT



**AS/NZS Approved**

**Emergency**

Emergency Power: 4W

Emergency Time: 3hrs

Charging Time: 24hrs

Rechargeable Li-ion Battery

Lifetime: 40,000 hrs

Operating temperature: 0-25°C

SKU	Model	Power (W)	Luminous Flux	Colour Temperature (K)	Diameter (mm)	Height (mm)
29462	AL08-12-25W-E	25	2450	4000	300	40

SUPPLIED BY



**GLOWBAL**

[www.glowbal.co.nz](http://www.glowbal.co.nz)

Phone: +64 9 254 4500 | Fax: +64 9 275 8183