




GLOWBAL

AC Wall Bracket



Product Code	Description	Weight Capacity
--------------	-------------	-----------------

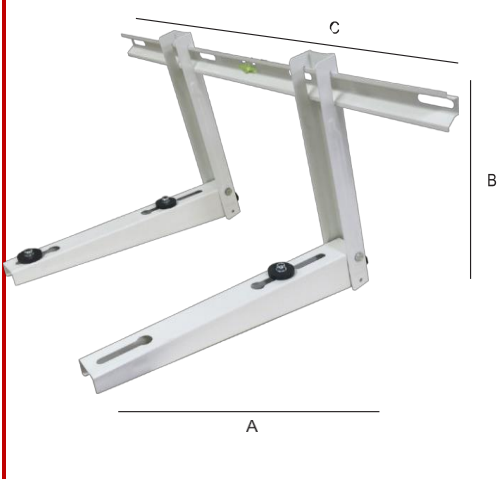

HL

- Classic and elegant cross-bar design, very popular!
- Highly weather-proof white powder-coated surface.
- Supplied with bolt, anti-vibration rubber accessories in bag.
- The distance to the wall can be easily adjusted.



HL-450	Wall bracket for A/C unit and condensing unit. Max weight 100KG. Size: 780X450X375. Gavanized with powder coated finish.	100KG
HL-550	Wall bracket for A/C unit and condensing unit. Max weight 150KG. Size: 780X552X375. Gavanized with powder coated finish.	150KG






1.1 AC bracket



GLOWBAL




Cleaners & Chemicals

Image	Product Code	Description
	R-CDD/1	Coil and Duct Disinfectant EPA Registered Hospital Grade 1.0 c/w sprayer
	R-CDD/5	Coil and Duct Disinfectant EPA Registered Hospital Grade 5L
	R-FCD/1	Filter Cleaner Degreaser, Biodegradable Filter Cleaner 1.0L c/w sprayer
	R-FCD/5	Filter Cleaner Degreaser, Biodegradable Filter Cleaner 5L
	4182-24	CAL Blue Plus Micro Leak Detector 0.95L c/w sprayer




GLOWBAL



External Rotor Motor Fan Assemblies

AC Fan Motor (220-240V/1ø/50Hz)

Image	Product Code	Dia (mm)	No of Blades	Pitch (Deg)	Rotation	Speeds RPM	Nom. Watts (HS/LS)	Notes	Weight
	R09R-3028A-4M-3509	300	5	28	RH	1370	80	Suitable for Patton A & B series Unit Coolers	3.5kg
	R11R-3530A-4M-3852	350	5	30	RH	1400	145	Suitable for Patton P series & NQAC 150-500 PattonPak to 6.0 HP	6.0kg


Welding & Brazing Equipment

Gas Cartridges

Image	Product Code	Description
	MAPP	Disposable "MAPP" gas (propylene) (400gm)
	OXY	Disposable "Oxygen" cylinder to suit Bromic brazing kit (136gm)
	P15-1KG	15% Silver 2.4mm diam x 750mm long, brown tip (1.0kg)



GLOWBAL



MONKEYTOE ROOF MOUNTS

Condenser Supports - Adjustable

Product Code	Kitset Description	Weight
	Light Weight Single Mount	
CS001.12.3	300mm Adjustable Support - 1200mm Purlins	0-80kgs
CS001.15.6	600mm Adjustable Support - 1500mm Purlins	0-80kgs
CS001.18.6	600mm Adjustable Support - 1800mm Purlins	0-80kgs
	Heavy Duty Single Mount	
CS001H.12.3	300mm HD Adjustable Mount - 1200mm Purlins	80-150kgs
CS001H.15.6	600mm HD Adjustable Mount - 1500mm Purlins	80-150kgs
CS001H.18.6	600mm HD Adjustable Mount - 1800mm Purlins	80-150kgs



GLOWBAL











PRE INSULATED - 20.0m COPPER TUBES(R410A -Rated)




Item Code	Description		Tube Wall Thickness
	Imperial	mm	mm
AP-23	1/4" X 3/8"	6.35 X 9.53	0.8 X 0.8
AP-24	1/4" X 1/2"	6.35 X 12.70	0.8 X 0.8
AP-25	1/4" X 5/8"	6.35 X 15.88	0.8 X 1.0
AP-35	3/8" X 5/8"	9.53 X 15.88	0.8 X 1.0
AP-36	3/8" X 3/4"	9.53 X 19.05	0.8 X 1.2



Image	Gas Code	Applications	Size
	R134A-13.6	R134A is a common refrigerant used in a wide range of refrigeration and mobile air conditioning applications, including medium and high temperature refrigeration (both domestic and commercial), residential & light air conditioning, automotive air conditioning and industrial applications such as centrifugal chillers.	13.6kg
	R410A-11.3	R410A refrigerant gas is used in domestic and light air conditioning equipment. R410A's low glide properties also make it suitable for some centrifugal compressors, and low temperature applications.	11.3kg
	R407C-11.3	R407C is a refrigerant suitable for residential & light air conditioning and direct expansion air conditioning systems. It is also used in medium temperature refrigeration systems.	11.3kg
	R404A-10.9	R404A is a refrigerant widely used in low to medium temperature refrigeration applications	10.9kg
	R407F-11.3	R407F refrigerant gas is a blend of HFC that is suitable for use in low and medium temperature applications such as commercial refrigeration. It is a suitable retrofit for R404A systems and offers a lower carbon footprint, and improved energy efficiency.	11.3kg
	R32-3.0	R32 refrigerant is also known as difluoromethane and belongs to the HFC family of refrigerant. This gas is poised to replace the other gaseous such as R-410A and R-407C as the preferred gas due to its lower Global Warming Potential. Its chemical formula is CH ₂ F ₂ .	3.0kg
	R449A-11.35	R449A is a next-generation HFO-based refrigerant that combines excellent cooling performance with improved energy efficiency and environmental properties.	11.35kg
	R452A-11.35	R452A Opteon® XP44 is a non-flammable, next-generation HFO-based refrigerant blend with a close performance match to R404A, including a similar low discharge temperature which makes it ideal for both new and retrofit transport refrigeration applications in place of R404A	11.35kg
	R600A-0.42	Refrigerant R600a, 400g can	400gm
	R600A ADAPTOR VALVE	Valve for 400gm R600a can	-



GLOWBAL

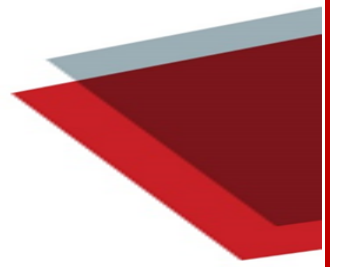

PVC Pipe Duct & Accessories Ivory White/ UV Stabilised

Image	Product Code	Description	Pack Quantity
		TOYO Ducting - 80mm/ Ivory White	
	TD-80	Ducting 2M lengths	5
	DC-80	Ducting Cap	20
	DL-80	Ducting 90Deg Elbow	20
	DK-80	Ducting Corner	20
	DJ-80	Ducting Joint	50
	DF-80S	Ducting Flexiable Joint	20
	DE-80	Ducting End Socket	20
	DS-80	Ducting Ceiling Cap	20
		TOYO Ducting - 120mm/ Ivory White	
	TD-120	Ducting 2M lengths	4
	DC-120	Ducting Cap	10
	DL-120	Ducting 90Deg Elbow	10
	DK-120	Ducting Corner	6
	DJ-120	Ducting Joint	20
	DF-120	Ducting Flexiable Joint	5
	DS-120	Ducting Ceiling Cap	10
		TOYO Accessories/ Ivory White	
	URH-14	Drain Pipe, Double Layer 14mm	50M/ctn