

LED SPOTLIGHT

IP65 Robust spotlight IP54 for PIR spotlight

Solid Body & excellent heat dissipation



29481



29482



29492 PIR



APPLICATIONS


- Hotels
- Lodges
- Homes
- Corridors

SPECIFICATIONS

Specs	29481	29482	29492
Power	13W	26W	46W
Lumen	1145lm	2190	2190lm
CCT	4000K	4000K	4000K
Rating	IP65	IP65	IP54
PF	0.9	0.9	0.8
CRI	≥ 80	≥ 80	≥ 80
Beam Angle	90°	90°	90°

FEATURES

- Easy to install
- IP 65 for non PIR Ext Spotlight
- IP 54 for PIR Spotlight
- High Lumen SMD LEDs, high brightness
- Efficacy 90lm/W
- Detection beam angle: 180°
- Detection range: Max. 10 meters at 24 scan
- Operating Temperature -20° to 45° C
- Warranty 1 Years product replacement




LED SPOTLIGHT


Dimensions (mm)



29481

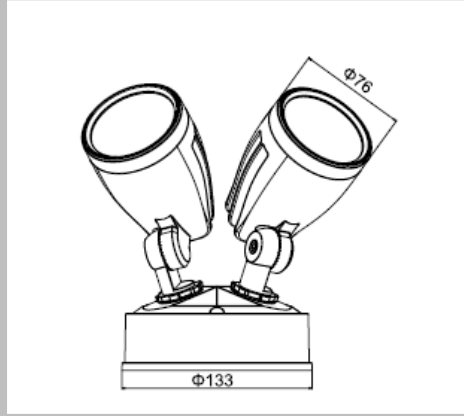

29482

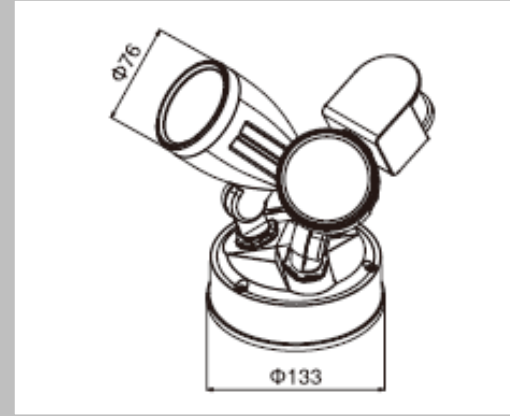




29492

Photometric Diagram

Polar intensity diagram

Cartesian intensity diagram

Beam diagram

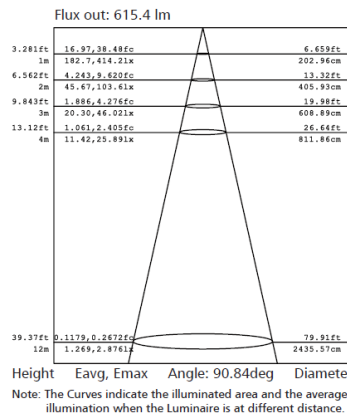
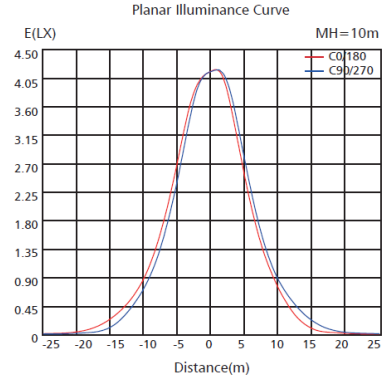
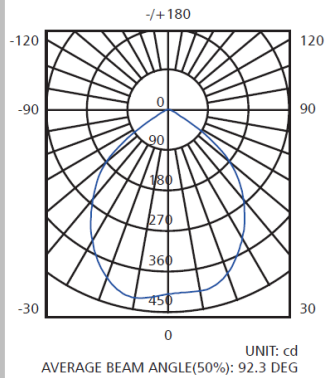


28481

Polar intensity diagram

Cartesian intensity diagram

Beam diagram

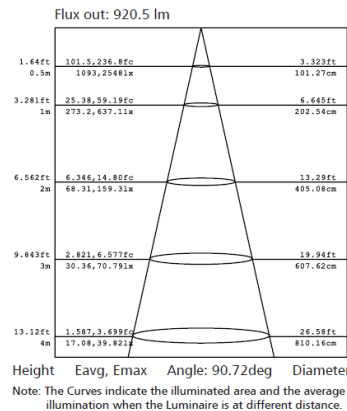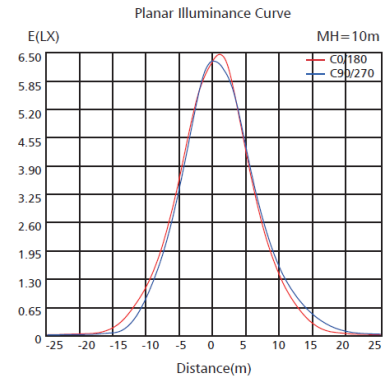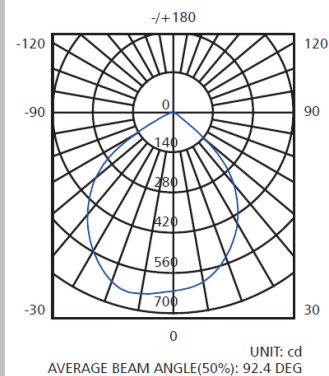

29482/29492

